


REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVE 審核
------------	-------------------	-------------	---------------

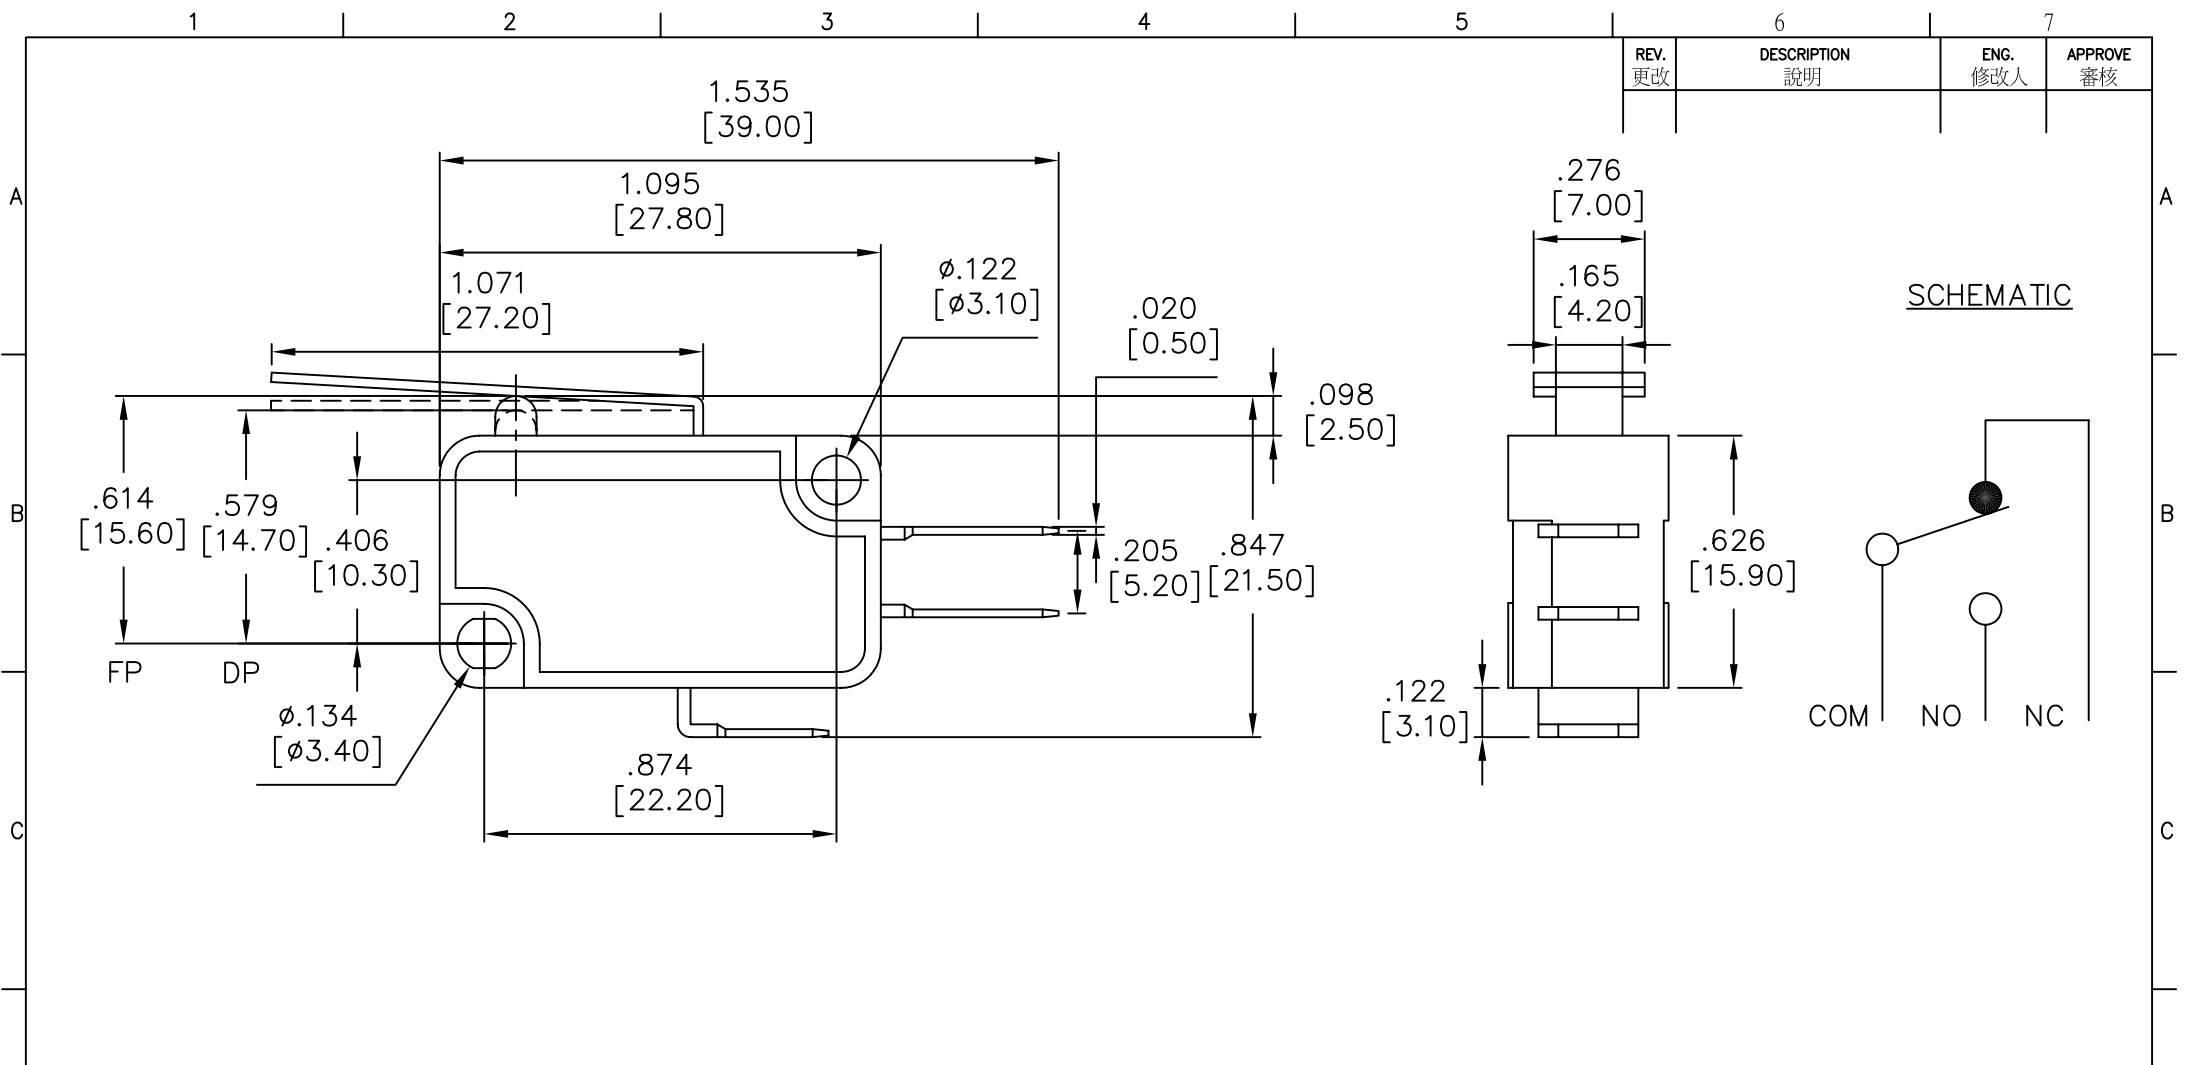

SPECIFICATIONS:

- 1.Rating:3A 125/250 VAC
- 2.Contact Resistance:Max. 100m-ohms (initial)
- 3.Insulation Resistance:DC500V 100M-ohms min.
- 4.Dielectric Strength:AC1000V 1 minute (initial)
- 5.Mechanical Life:100,000 cycles
- 6.Electrical Life:10,000 cycles
- 7.Soldering Temperature:225°C for 5 seconds
- 8.Operating Temperature:-15°C to +70°C

ITEM NO. 料號	DM-VM-02-C-07
----------------	---------------

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS COMPONENTS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS COMPONENTS LTD.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 10.00mm	±0.20mm
10.01 TO 20.00mm	±0.25mm
20.01 TO 30.00mm	±0.30mm
30.01	±0.40mm

<p>泰瑋電子有限公司 TAIWAY ELECTRONICS COMPONENTS CO.,LTD.</p>			
USED 用途	DM	APPD. 審核	Amy 2003/08/28
FINISH 處理		CHKD. 校對	Amy 2003/08/28
SCALE 比例	2 / 1	UNIT 單位	in(mm)
		DR. 製圖	Amy 2003/08/28
TITLE 名稱	MICRO SWITCH		
DWG NO. 圖號	VM-02-C-07		SIZE 圖紙
			A4
FILE NAME 檔案名稱	VM02C07.dwg	SHEET 張	1 / 1
		REV. 更改	1