REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVE 審核

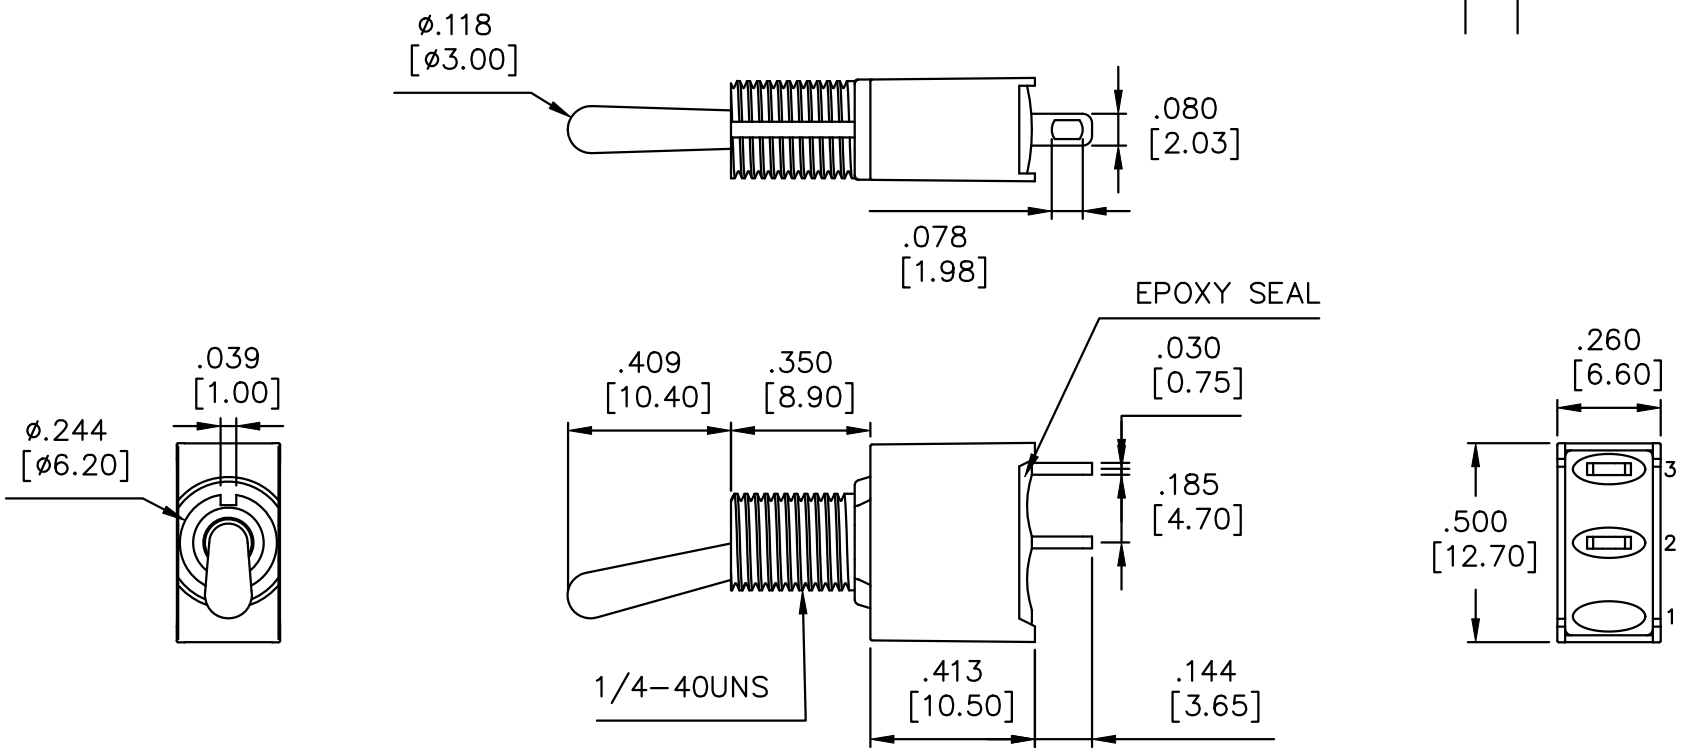

MODEL NO.	SWITCH POSITION		
W2P-1	ON	NONE	OFF
Term. Comm.	2-3	OPEN	2-1

SPECIFICATIONS:
1.MOVABLE CONTACT: Copper alloy, silver plated
2.TERMINALS: Silver plated with outer layer in gold plating
3.RATING: 5Amps with resistive load @ 125VAC or 28VDC
2Amps with resistive load @ 250VAC
4.CONTACT RESISTANCE: 10m-ohms max. initial
5.INSULATION RESISTANCE: 1,000M-ohms min.
6.DIELECTRIC STRENGTH: 1,500V RMS @ sea level
7.ELECTRICAL LIFE: 50,000 make and break cycles at full load
8.OPERATING TEMPERATURE: -30°C to +85°C

ITEM NO. 料號	100A-W2P-1-T1B1M1GE 1A21T1B1M1GE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS LTD.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01 ↑	±0.40mm

MATERIAL

泰 瑋 電 子 有 限 公 司
TAIWAY ELECTRONICS COMPONENTS CO.,LTD.

USED 用途	100A	APPD. 審核	Amy 2007/10/30
FINISH 處理		CHKD. 校對	Amy 2007/10/30
SCALE 比例	2 / 1	UNIT 單位 in(mm)	DR. 製圖 Amy 2007/10/30
TITLE 名稱	SEALED TOGGLE SWITCH		
DWG NO. 圖號	100A-W2P-1-T1B1M1GE		SIZE 圖紙 A4
FILE NAME 檔案名稱	1AS2111GE.dwg	SHEET 張 1 / 1	REV. 更改 1

DATE: 96.10.30 文號: ER-013b