REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVE 審核

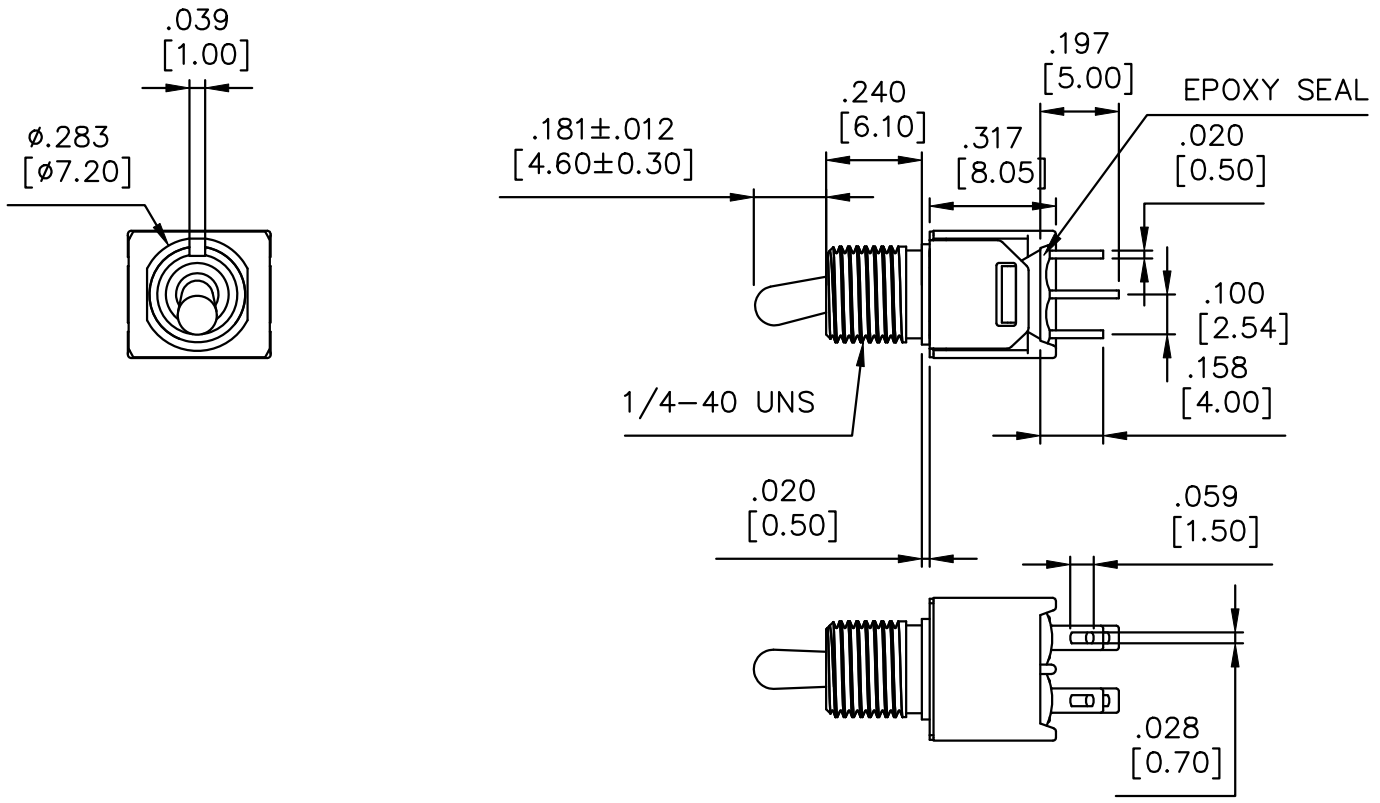

Model No.	Switching Position		
MDP-1	ON	NONE	ON
MDP-2	ON	NONE	(ON)
MDP-3	ON	OFF	ON
MDP-4	(ON)	OFF	(ON)
MDP-5	ON	OFF	(ON)
Term. Comm.	2-3,5-6	OPEN	2-1,5-4

SPECIFICATIONS:
1.MOVABLE CONTACT: Copper alloy, silver plated
2.TERMINALS: Copper alloy, silver plated
3.RATING: 3Amps with resistive load @ 125VAC or 28VDC
1.5Amps with resistive load @ 250VAC
4.CONTACT RESISTANCE: 20m-ohms max. initial
5.INSULATION RESISTANCE: 1,000M-ohms min.
6.DIELECTRIC STRENGTH: 1,500V RMS @ sea level
7.ELECTRICAL LIFE: 30,000 make and break cycles at full load
8.OPERATING TEMPERATURE: -30℃ to +85℃

ITEM NO. 料號	200-MDP-2-T2B7M1QE 2MD2T2B700M1QE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS COMPONENTS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS COMPONENTS LTD.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 10.00mm	±0.20mm
10.01 TO 20.00mm	±0.25mm
20.01 TO 30.00mm	±0.30mm
30.01 ↑	±0.40mm

MATERIAL

泰瑋電子有限公司
TAIWAY ELECTRONICS COMPONENTS CO.,LTD.

USED 用途	200	APPD. 審核	Amy 2002/06/20
FINISH 處理		CHKD. 校對	Amy 2002/06/20
SCALE 比例	2 / 1	UNIT 單位	in(mm)
		DR. 製圖	Amy 2002/06/20
TITLE 名稱	TOGGLE SWITCH		
DWG NO. 圖號	200-MDP-X-T2B7M1QE	SIZE 圖紙	A4
FILE NAME 檔案名稱	2MD111QE.dwg	SHEET 張	1 / 1
		REV. 更改	2

DATE: 91.06.20

文號:ER-013b