


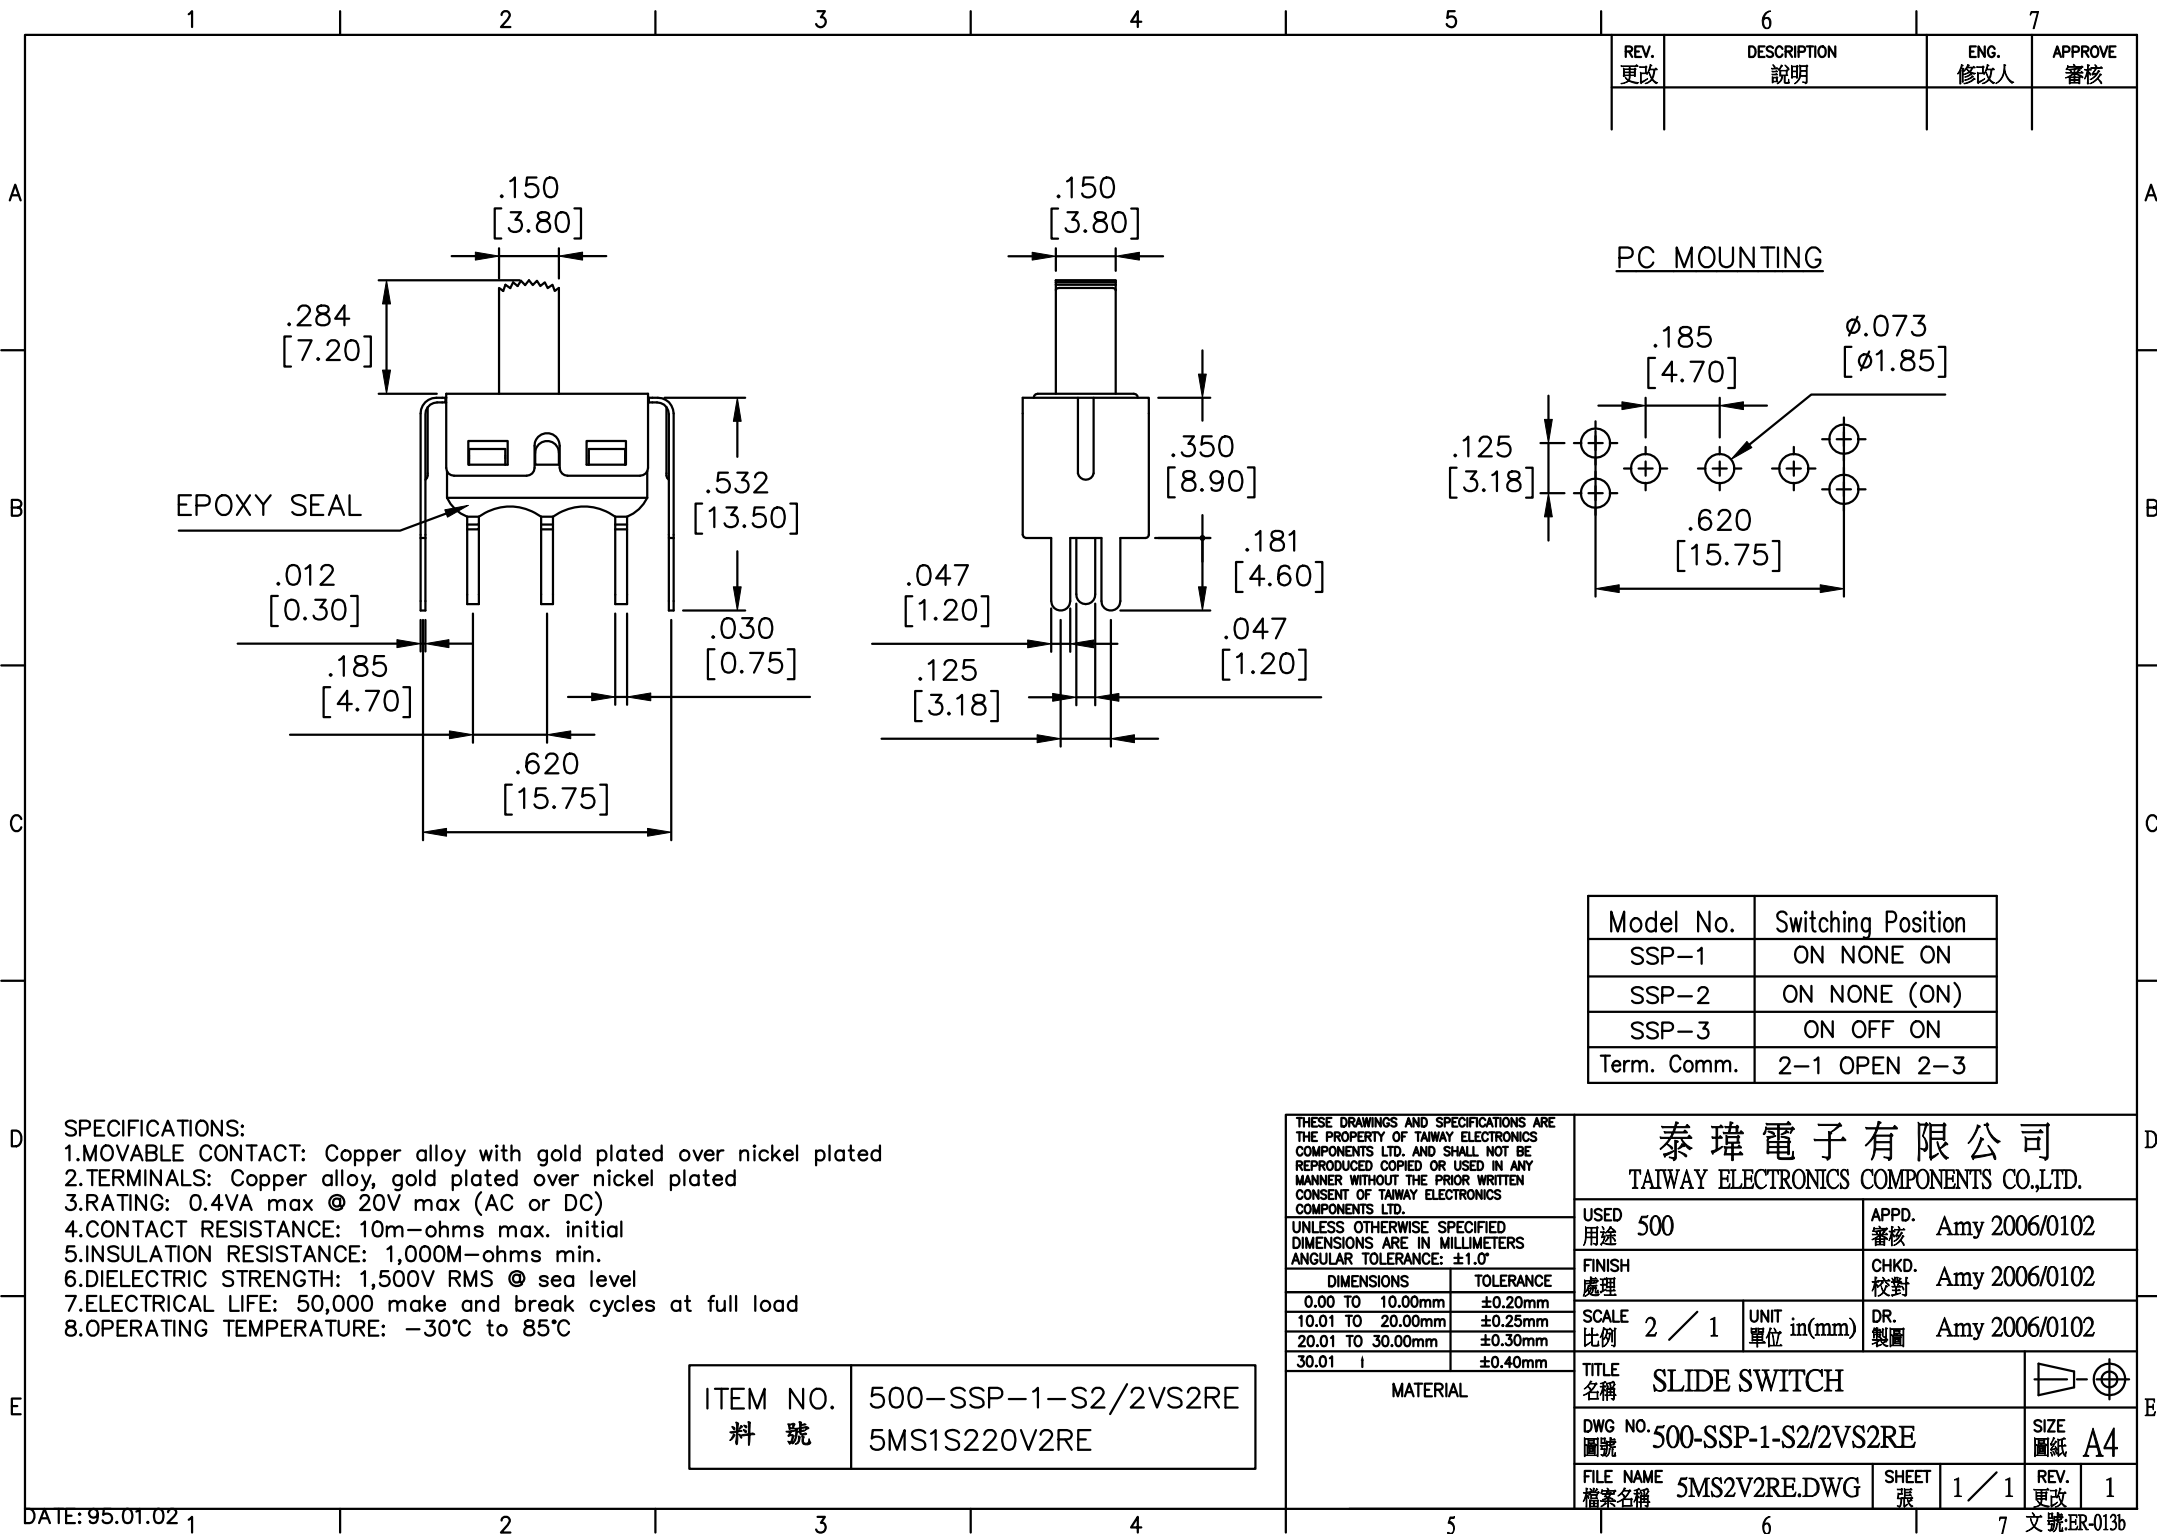

REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVE 審核

Model No.	Switching Position
SSP-1	ON NONE ON
SSP-2	ON NONE (ON)
SSP-3	ON OFF ON
Term. Comm.	2-1 OPEN 2-3

SPECIFICATIONS:

- MOVABLE CONTACT: Copper alloy with gold plated over nickel plated
- TERMINALS: Copper alloy, gold plated over nickel plated
- RATING: 0.4VA max @ 20V max (AC or DC)
- CONTACT RESISTANCE: 10m-ohms max. initial
- INSULATION RESISTANCE: 1,000M-ohms min.
- DIELECTRIC STRENGTH: 1,500V RMS @ sea level
- ELECTRICAL LIFE: 50,000 make and break cycles at full load
- OPERATING TEMPERATURE: -30°C to 85°C

ITEM NO.	500-SSP-1-S2/2VS2RE
料號	5MS1S220V2RE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS COMPONENTS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS COMPONENTS LTD.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 10.00mm	±0.20mm
10.01 TO 20.00mm	±0.25mm
20.01 TO 30.00mm	±0.30mm
30.01 TO 100.00mm	±0.40mm

泰瑋電子有限公司
TAIWAY ELECTRONICS COMPONENTS CO.,LTD.

USED 用途	500	APPD. 審核	Amy 2006/0102
FINISH 處理		CHKD. 校對	Amy 2006/0102
SCALE 比例	2 / 1	UNIT 單位	in(mm)
		DR. 製圖	Amy 2006/0102

TITLE 名稱	SLIDE SWITCH	SIZE 圖紙	A4
DWG NO. 圖號	500-SSP-1-S2/2VS2RE	REV. 更改	1
FILE NAME 檔案名稱	5MS2V2RE.DWG	SHEET 張	1 / 1