REV. 更改	DESCRIPTION 說明	ENG. 修改人	APPROVE 審核

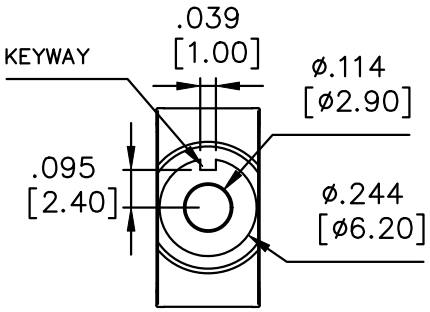

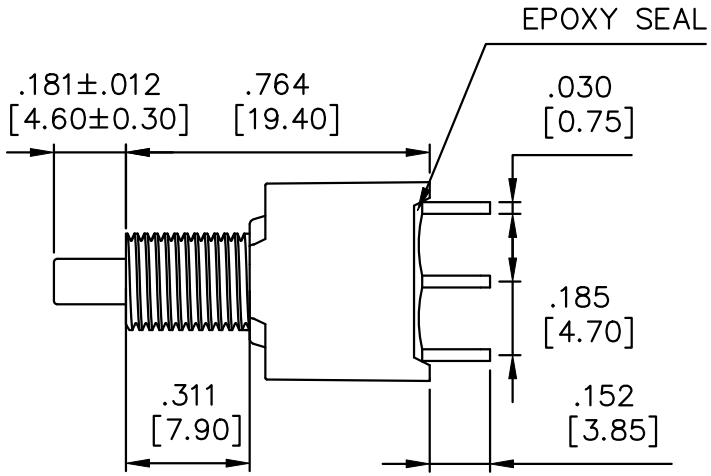

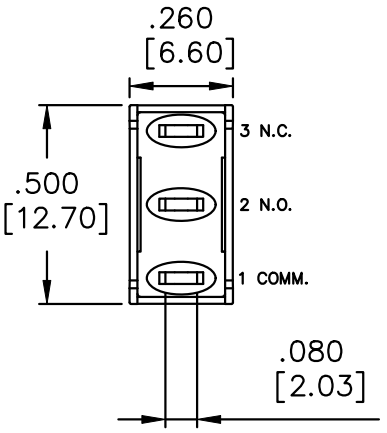

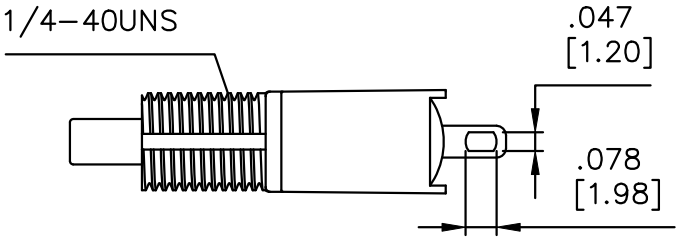

Model No.	Type	
WSP-7	ON	MOM
Term. Comm.	1-3	1-2

SPECIFICATIONS:
1.MOVABLE CONTACT: Copper alloy, silver plated
2.TERMINALS: Copper alloy, silver plated
3.RATING: 1Amps @ 120VAC or 38VDC
4.CONTACT RESISTANCE: 10m–ohms max. initial
5.INSULATION RESISTANCE: 1,000M–ohms min.
6.DIELECTRIC STRENGTH: 1,500V RMS @ sea level
7.ELECTRICAL LIFE: 50,000 make and break cycles at full load
8.OPERATING TEMPERATURE: –30℃ to +85℃
9.IP Class: IP68.

ITEM NO. 料 號	700A–WSP7–P100B1M1QE 7AS7P1B100M1QE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS LTD.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
ANGULAR TOLERANCE: ±1.0°

DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01 I	±0.40mm

MATERIAL

泰瑋電子有限公司
TAIWAY ELECTRONICS COMPONENTS CO.,LTD.

USED 用途	700A	APPD. 審核	Amy 2024/04/12
FINISH 處理		CHKD. 校對	Amy 2024/04/12
SCALE 比例	1 ／ 1	UNIT 單位 in(mm)	DR. 製圖 Polly 2024/04/12
TITLE 名稱	PUSHBUTTON SWITCH		
DWG NO. 圖號	700A-WSP7-P100B1M1QE		SIZE 圖紙 A4
FILE NAME 檔案名稱	7AS7P1B100M1QE.dwg	SHEET 張 1／1	REV. 更改 1

DATE: 113.04.12 1

7文號: ER–013b