


61058 Approved



SPECIFICATIONS:

CONTACT RATING: Refer to "Contact Material Options" for more info.
ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10mΩ max. initial.
INSULATION RESISTANCE: 1,000MΩ min.@500VDC.
DIELECTRIC STRENGTHS: 2,000V RMS @ sea level.
OPERATING TEMPERATURE:-30°C to +85°C.


MATERIALS:

CASE: Diallyl phthalate(DAP)(UL 94V-0).
ROCKERS: Nylon 6/6 or ABS.
BUSHING: Zinc, nickel plated.
HOUSING: Stainless steel.
FRONT/REAR MOUNTING: Stainless steel.
SWITCH SUPPORT: Brass, tin plated.
TERMINAL SEAL: Epoxy.



Specifications and Dimensions subject to change

If your preferred product configuration is not shown, please contact our sales representative for custom design.


HOW TO ORDER SYSTEM

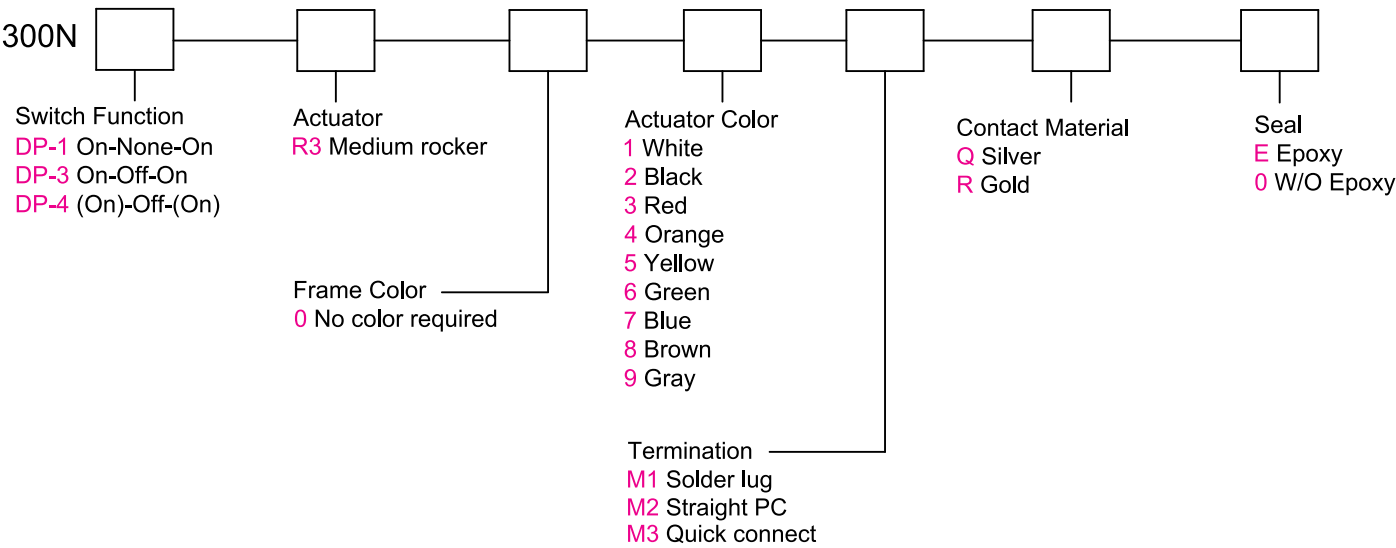

DPDT

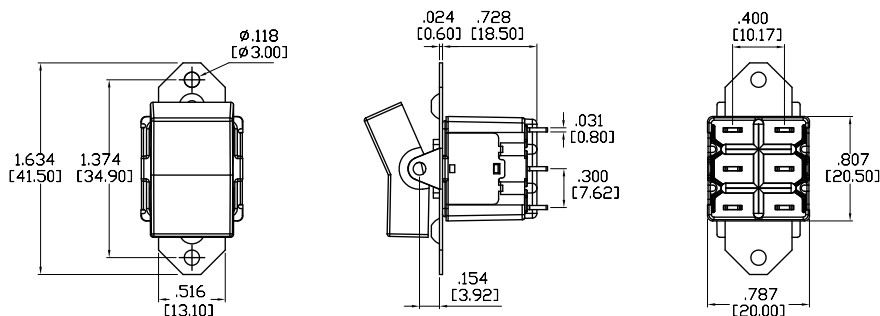



Model No.	Switching Position		
DP-1	ON	NONE	ON
DP-3	ON	OFF	ON
DP-4	(ON)	OFF	(ON)
Term. Comm.	2-3,5-6	OPEN	2-1,5-4




ACTUATOR OPTIONS FOR PANEL REAR MOUNT

R3

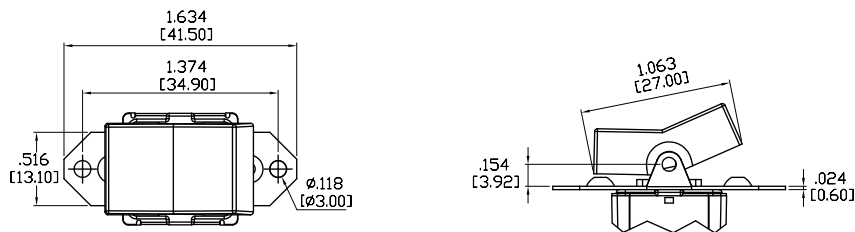


TERMINATION OPTIONS

M1 SOLDER LUG




THK .031 [0.8]

M2 Straight PC



THK .031 [0.8]

M3 QUICK CONNECT



THK .031 [0.8]

CONTACT MATERIAL OPTIONS

Coding	Contact Material	Terminal Plating	Rating	Agency Approvals
Q	Silver ¹	Silver plated ¹	6Amps @ 250VAC 10Amps @ 125VAC 6Amps @ 48VDC	
R	Gold ²	Gold plated ⁴	0.4VA max @ 20V max (AC or DC)	

1. Movable Contact / Terminals: Copper alloy, silver plated.
2. Movable Contact: Copper alloy with gold plated over nickel plated.
4. Terminals: Copper alloy, with gold plated over nickel plated.