SPECIFICATIONS:

CONTACT RATING: 50mA 12VDC.
CONTACT RESISTANCE: 100m-ohms max.
TRAVEL: 0.25±0.10mm.
LIFE: 100,000 cycles min.
OPERATING FORCE: 130, 160±30, 250±50gf.

MATERIALS:

CASE & STEM: Nylon 66 G30%.
COVER: 0.3t electrolytic tin plate (E.T).
TERMINAL: 0.3t C2680R-EH.
C/PLETAT: 0.06t AG-C5210R-EH.
RUBBER: Silicon.

Specifications and Dimensions subject to change

KRSS-0712

P.C.MOUNTING









L	DIM. "A"
1	.185 [4.70]
2	.205 [5.20]
3	.272 [6.90]
4	.394 [10.00]

KRSS-0714

P.C.MOUNTING



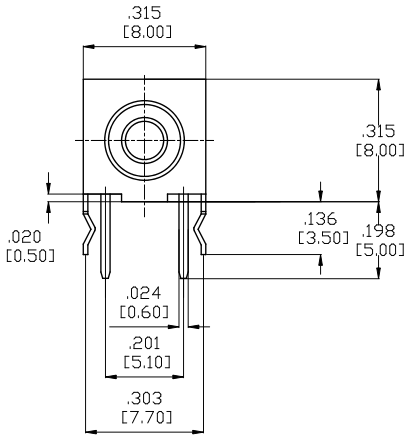





L	DIM. "A"
1	.138 [3.50]
2	.158 [4.00]
3	.225 [5.70]
4	.343 [8.70]
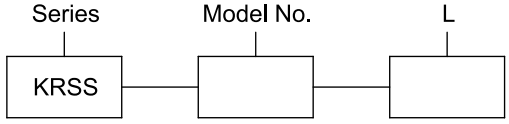
HOW TO ORDER