M7



DPDT

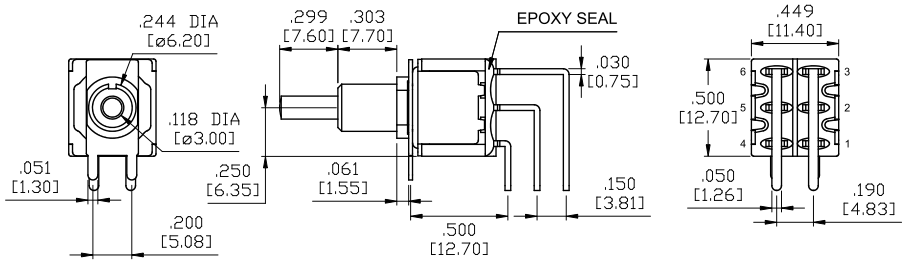

P.C.MOUNTING



M7



3PDT

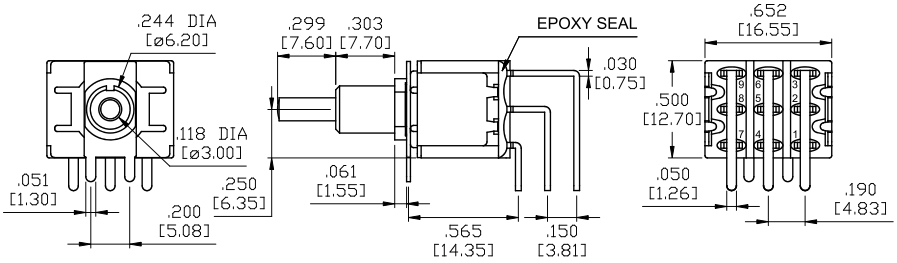

P.C.MOUNTING



M7



4PDT

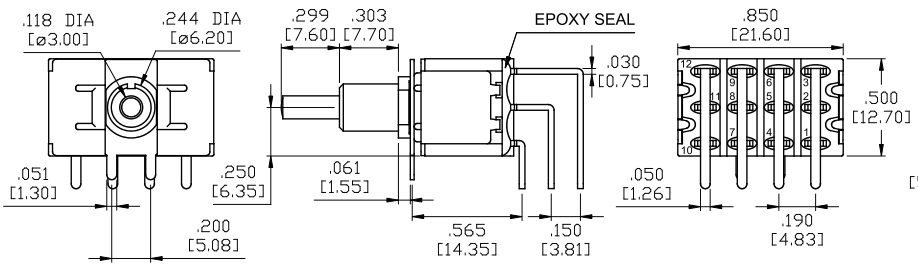

P.C.MOUNTING



VS2-VS3



SPDT

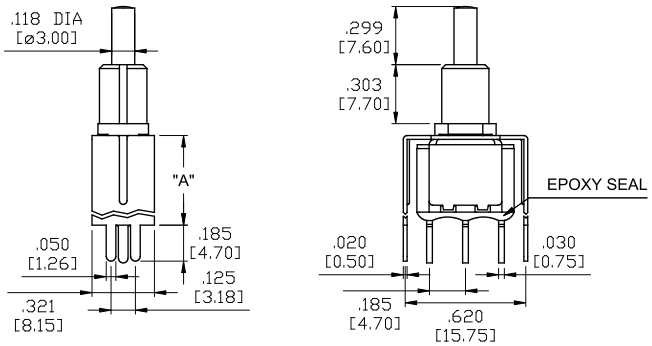

OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C.MOUNTING



VS2-VS3

DPDT

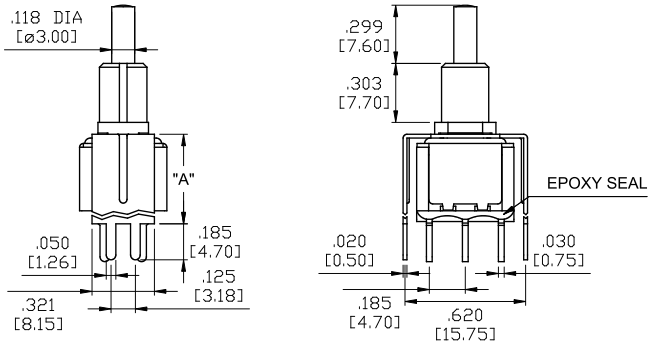

OPTION CODE	DIM.'A'
VS2	.461 [11.70]
VS3	.630 [16.00]

P.C.MOUNTING



VS4-VS5



SPDT

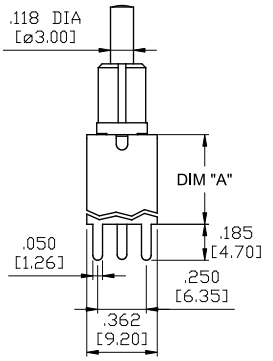

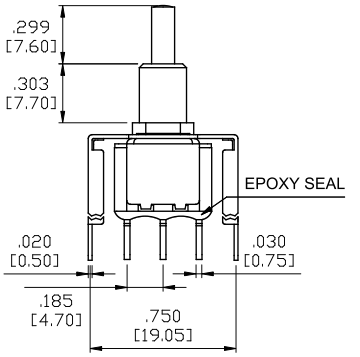

OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING



VS4-VS5

DPDT

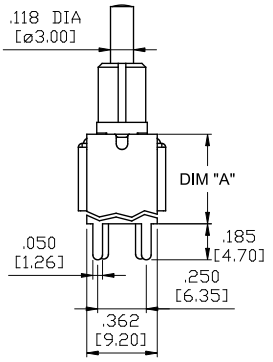

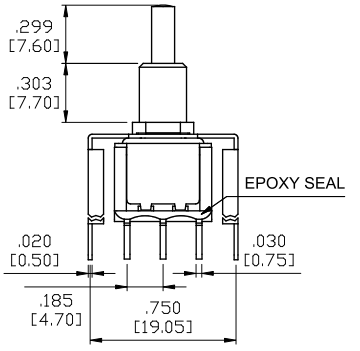

OPTION CODE	DIM.'A'
VS4	.461 [11.70]
VS5	.630 [16.00]

P.C.MOUNTING



PLUNGER CAPS

C1



C2



C3



C4



C5



For PL plunger only

C6



For PD plunger only

C7



For PL plunger only

CAP AND FRAME COLORS	
1	White
2	Black
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

MATERIAL: ABS for C1~C5.
MATERIAL: Brass for C6
Chrome or nickel plated.

PANEL MOUNTING

1/4 INCH BUSHING







15/32 INCH BUSHING





HARDWARE

NUT

STD. HDW2

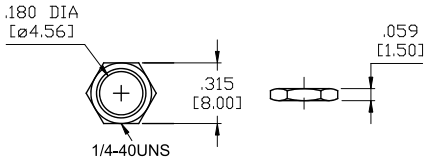

DRESS NUT HDW3

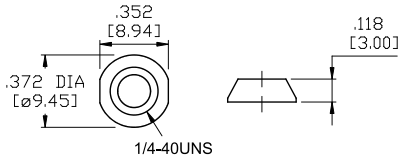

HDW4 - FOR PC & PD PLUNGER

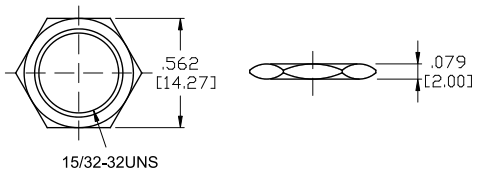

LOCKING RING

STD. HDW15



STD. HDW16



HDW17 - FOR PC & PD PLUNGER

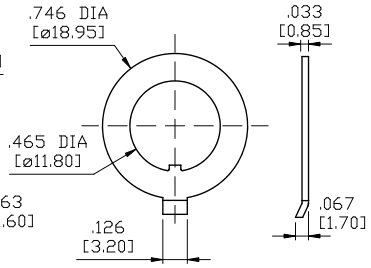

LOCK WASHER

STD. HDW11



HDW12 - FOR PC & PD PLUNGER



CONTACT MATERIAL OPTIONS

Coding	Contact Material	Terminal Plating	Rating	Agency Approvals
Q	Silver [1]	Silver plated [6]	6Amps @ 125VAC or 28VDC 3Amps @ 250VAC	c UL us
P		Tin plated [5 8]		
R	Gold [2]	Gold plated [4]	0.4VA max @ 20V max (AC or DC)	
K		Tin plated [5 7]		
G	Silver [1]	Gold over silver [3]	6Amps @ 125VAC or 28VDC 3Amps @ 250VAC	c UL us

1. Movable Contact: Coin silver, silver plated.
2. Movable Contact: Copper alloy with gold plated over nickel plated.
3. Terminals: Silver plated with outer layer in gold plating.
4. Terminals: Copper alloy, with gold plated over nickel plated.
5. Outer Terminals: Copper alloy with pure tin plated.
6. Terminals: Copper alloy, silver plated.
7. Terminal Contact: Gold plated over nickel plated.
8. Terminal Contact: Palladium nickel alloy (or Silver) plated.

* P, K not available with M1 termination.